(6+1)×1/(18+1)×1 Fiber Pump Signal Combiner（XHP-CMB）

☆Product Description

The (6+1)×1/(18+1)×1 fiber pump signal combiner（XHP-CMB）, produced by XHP ,features high pump beam combination efficiency ,low signal insertion loss , as well as stable and reliable performance. It is suitable for middle and high power fiber laser, middle and high power fiber amplifier , scientific research and test equipment , etc.

☆Product Picture

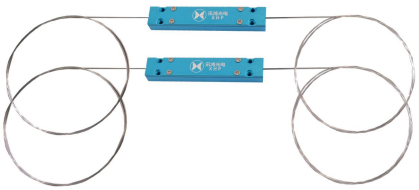

☆Product Specification

Port Type	（6+1）×1			（18+1）×1	
Pump Wavelength	800～1000nm				
Signal Wavelength	1030～1080nm or 1450～1600nm				
Signal Input Fiber	X/125 or X/250 or 20/400			X/125	
Pumping Fiber	105/125 0.15NA/0.22NA		105/125 0.15NA/0.22NA 200/220 0.22NA	105/125 0.15NA/0.22NA	
Output Fiber	Y/125	Y/250	20/400	Y/250	20/400
Pump Efficiency	>90%	>93%	>95%	>93%	>95%
Loss	<0.7dB				
Single Arm Carries Power	100W		200W	100W	
Return Loss	>45dB				
Facula Quality	Customization				
Package Size	Φ4×60mm，70×12×8mm，100×15×10mm				
Operating Temperature（℃）	0℃～+75℃				
Storage Temperature（℃）	-40℃～+85℃				

Address: 4F, Building 3, Xinhe Pioneer Park, No.33 Nanjiang Road, Linqiong Industrial Park, Qionglai City, Chengdu, China
Website：www.xh-photonics.com Email：cdxunhong@163.com
Tel:：13266835472

☆**Ordering Information**

Product Model	Explain	Options
XXX-XXX	Device Type	**XHP-CMB**
X	Port Type	**6**=（6+1）×1 **18**=（18+1）×1
XXX/XXXX	Operating Wavelength	Pumping Wavelength：**P1**=915nm，**P2**=975nm Signal Wavelength：**S1**=1064nm，**S2**=1550nm，**S3**=2000nm
X	Pump Direction	**F**=Forward pump **B**=Backward pump
X	Pump Fiber	**PF1**=105/125 NA=0.22 **PF2**=105/125 NA=0.15 **PF3**=200/220 NA=0.22
X	Signal Input Fiber	**SF1**=DCF6/125 NA=0.14/0.46 **SF2**=DCF8/125 NA=0.14/0.46 **SF3**=DCF10/125 NA=0.08/0.46 **SF4**=DCF20/125 NA=0.08/0.46 **SF5**=DCF20/250 NA=0.08/0.46 **SF6**=DCF30/250 NA=0.06/0.46 **SF7**=DCF25/250 NA=0.06/0.46
X	Output Fiber	**OF1**=DCF6/125 NA=0.14/0.40 **OF2**=DCF8/125 NA=0.14/0.46 **OF3**=DCF10/125 NA=0.08/0.46 **OF4**=DCF20/125 NA=0.08/0.46 **OF5**=DCF20/250 NA=0.08/0.46 **OF6**=DCF30/250 NA=0.06/0.46 **OF7**=DCF25/250 NA=0.06/0.46 **OF8**=DCF20/400 NA=0.06/0.46
XX	Fiber Length	**L08**=0.8m **L1**=1m
X	Package Size	**PS1**=Aluminum box 70×12×8mm **PS2**=Aluminum box 100×15×10mm **PS3**=Steel tube Φ4×60mm

E.g：XHP–CMB-6-P1S1-F-PF1-SF1-OF1-L1-PS2

Address: 4F, Building 3, Xinhe Pioneer Park, No.33 Nanjiang Road, Linqiong Industrial Park, Qionglai City, Chengdu, China
Website：www.xh-photonics.com Email：cdxunhong@163.com
Tel:：13266835472