


光纤模场适配器 (XHP-MFA)

☆产品描述

讯鸿(XHP)生产的光纤模场适配器(XHP-MFA)输出功率高,转换效率高,稳定可靠。适用于中高功率光纤放大器和中高功率光纤激光器。

☆产品图片

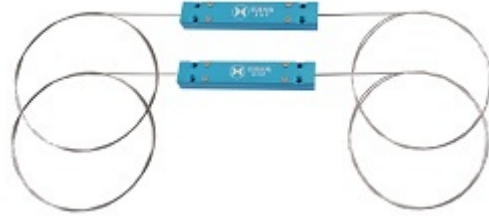

☆产品规格

信号波长	1030~1080 或 1450~1600					
信号输入光纤	6/125	10/125	10/125	6/125	20/250	62.5/125
信号输出光纤	10/125	20/125	25/250	20/400	30/250	105/125
正向损耗	0.3dB	0.4dB	0.5dB	0.5dB	0.2dB	-
反向损耗	0.3dB	0.5dB	0.7dB	0.7dB	0.2dB	2dB
总功率	10W, 50W, 100W					
回波损耗	> 45dB					
消光比	>18dB (PM 类型)					
封装尺寸	Φ4×60mm, 70×12×8mm, 100×15×10mm					
工作温度	0℃~+75℃					
储存温度	-40℃~+85℃					

☆订购信息

器件编号	说明	选项
XXX-XXX	器件类型	XHP-MFA, XHP-PMMFA
XX	端口类型	1 = 1×1
XXXX	工作波长	W1 = 1030~1080nm, W2 = 1450~1600nm
XX	输入光纤	IF1 = SMF-28E, IF2 = DCF6/125 NA=0.14/0.46, IF3 = DCF8/125 NA=0.14/0.46, IF4 = Hi1060, IF5 = DCF20/250 NA=0.08/0.46, IF6 = SCF10/125, IF7 = 50/125, IF8 = 62.5/125
XX	输出光纤	OF1 = DCF8/125 NA=0.14/0.46, OF2 = DCF10/125 NA=0.08/0.46, OF3 = DCF20/125 NA=0.08/0.46, OF4 = DCF20/250 NA=0.08/0.46, OF5 = DCF30/250 NA=0.06/0.46, OF6 = DCF25/250 NA=0.06/0.46, OF7 = SCF10/125, OF8 = 105/125 NA=0.15, OF9 = 105/125 NA=0.22
XXX	光纤长度	L10 = 1.0m
XXX	光缆长度	L12 = 12m
XXX	封装尺寸	PS1 = 铝盒 70×12×8mm, PS2 = 铝盒 100×15×10mm, PS3 = 钢管 Φ4×60mm

举例: XHP - MFA-W1-IF1-OF1-L10-L12-PS1